



# Solar Street Light YL series

---



## Professional light distribution design

The illumination area and angle of light can be adjusted reasonably according to the width of the road



## Intelligent charge and discharge management

Double protection of charging and discharging by software and hardware, and intelligent equalization technology, cycle charging and discharging more than 2000 times



## Intelligent power control

Judge recent climate plan the reasonable discharge power




## Battery Power indicator

To check lamp's charge and discharge conveniently



## IPC 5.0 Technology

Through 10years' experience, Road Smart upgraded highly precise 5.0 version IPC technology (intelligent power control 5.0). It will intelligently detect recent weather conditions, reasonably plan the discharge power to achieve more rainy days

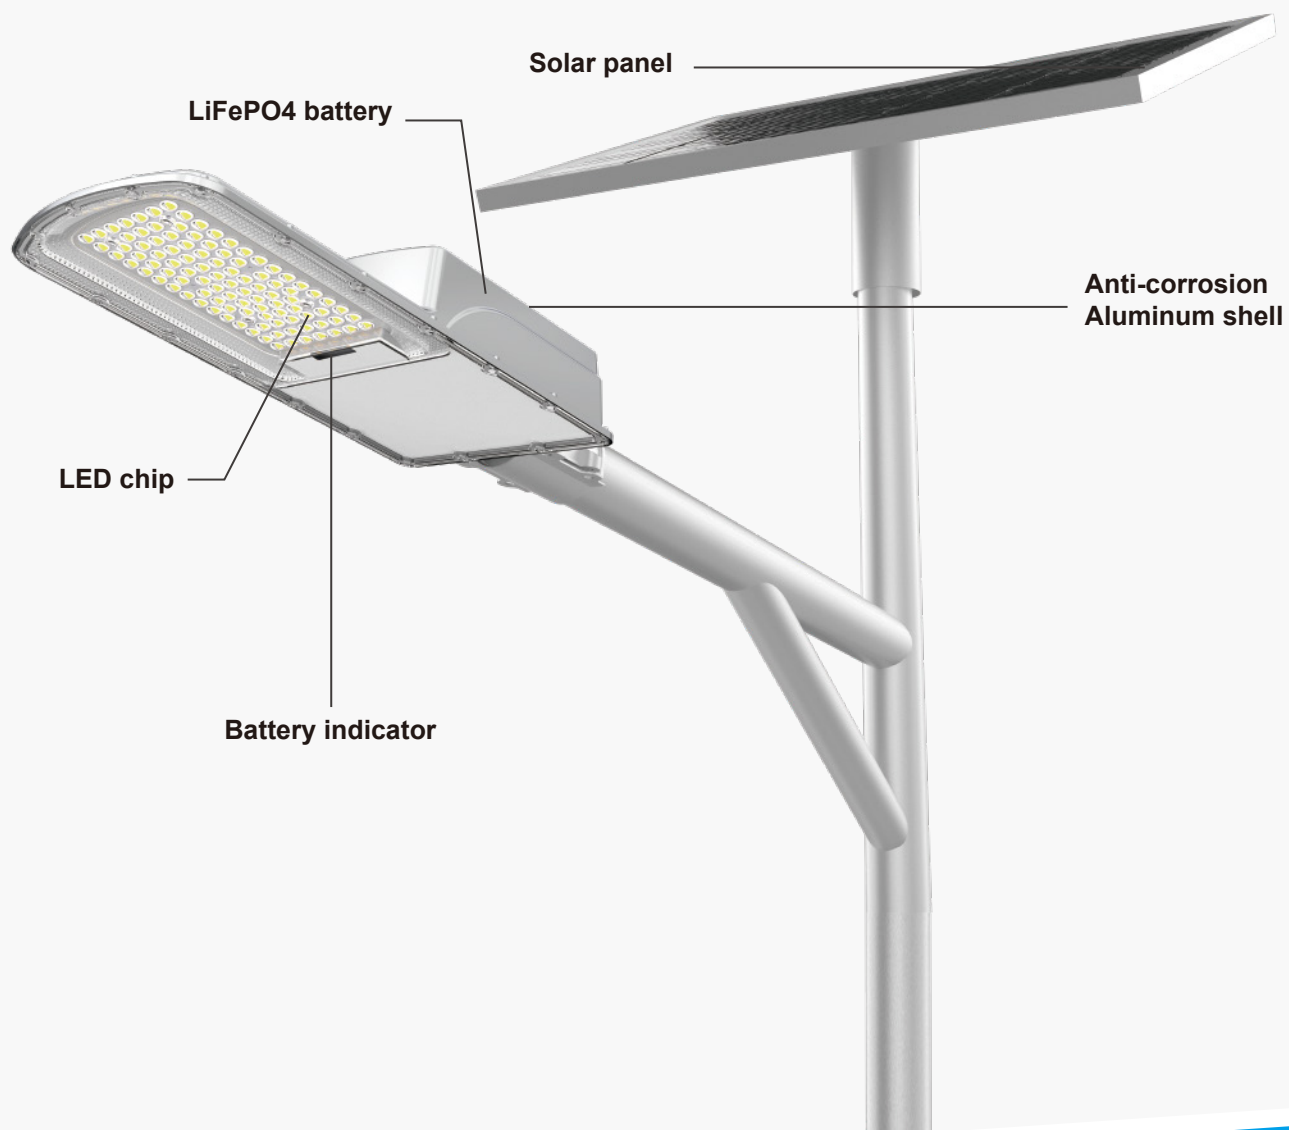


Battery Indicator



## Remote Control

### 6 working modes

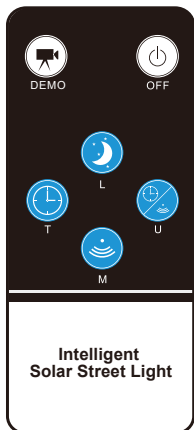


- DEMO: No matter day or night, light "on" for 1 minute. Only for test use
- OFF: Light "off", no matter day or night
- L: At night, 100%-3hrs, 50%-2hrs, 20%-dawn
- T: At night, 3hrs-100%, 3hrs-50%, 2hrs-30%
- M: At night, 3hrs-100%, 3hrs-50%
- U: At night, 100%-3hrs, 50%-3hrs(Highlight mode)

Remark:

- 1、6 working modes option via remote control, default mode is L.
- 2、U Highlight mode: Increase 30% on the original basis, mean 3H-130%, 3H-80%


## Dimension

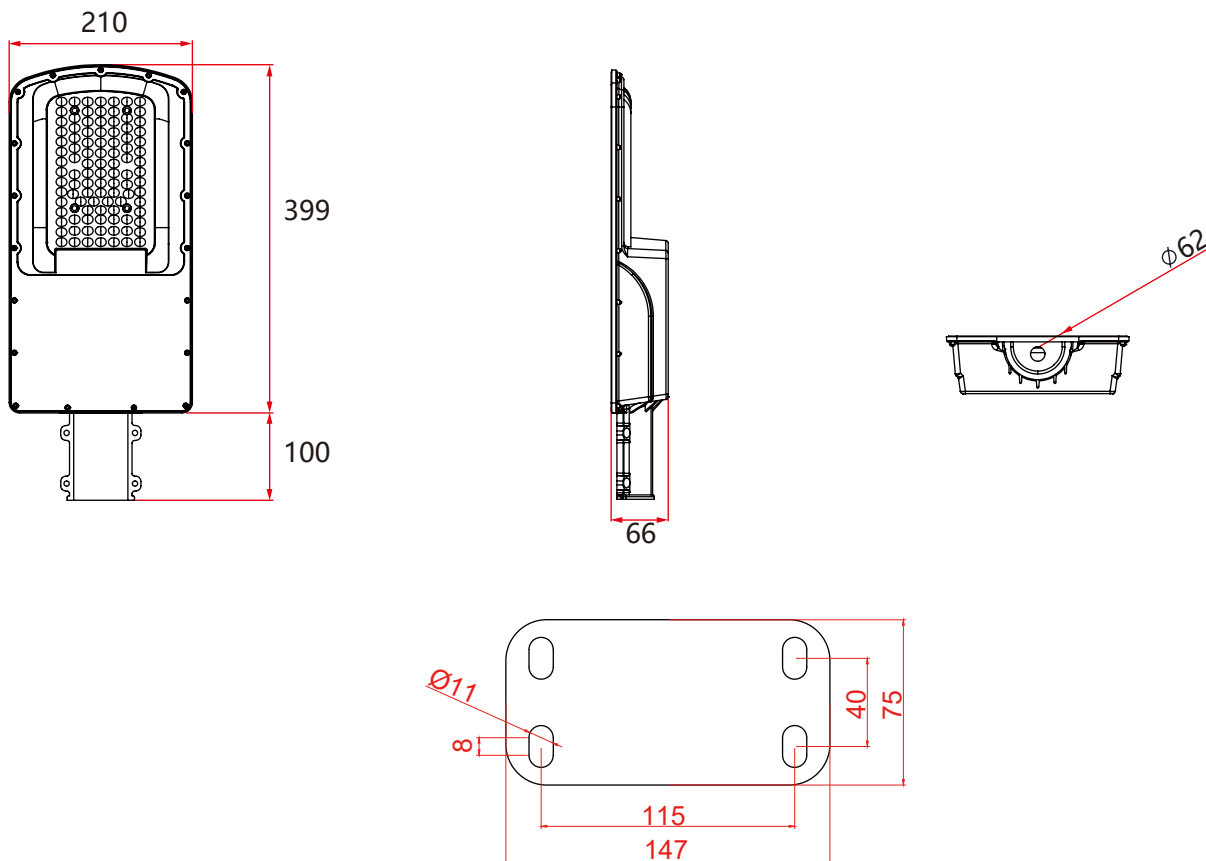


30P Wall mounting bracket hole location map

# Dimension

## Solar panels

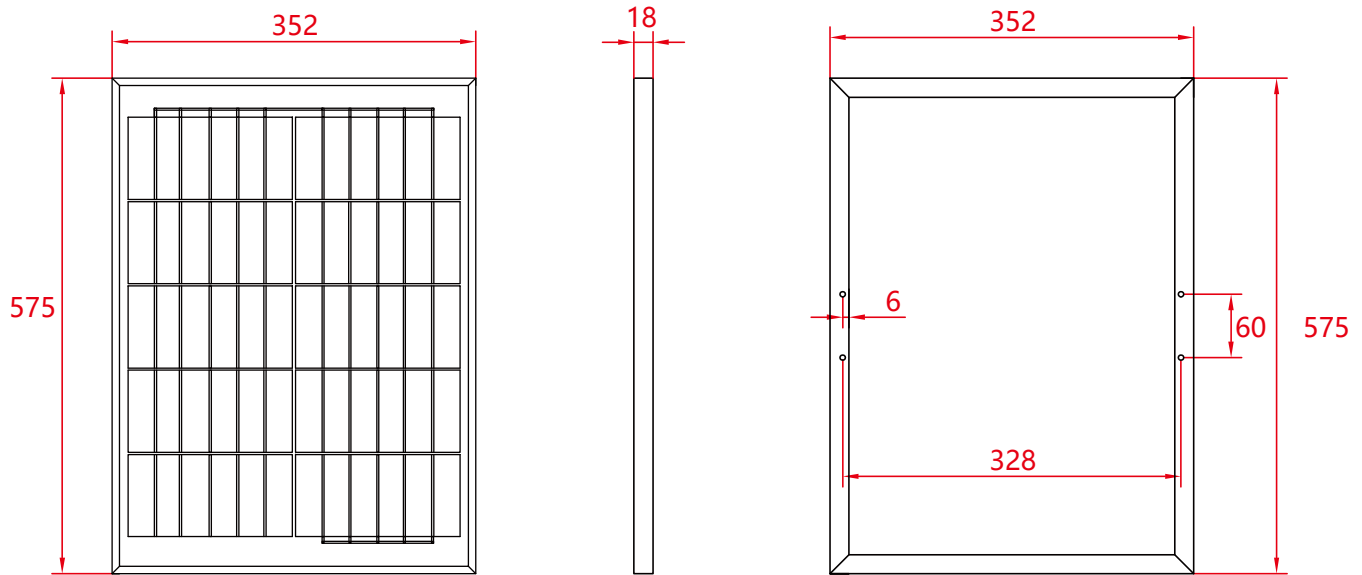

30W

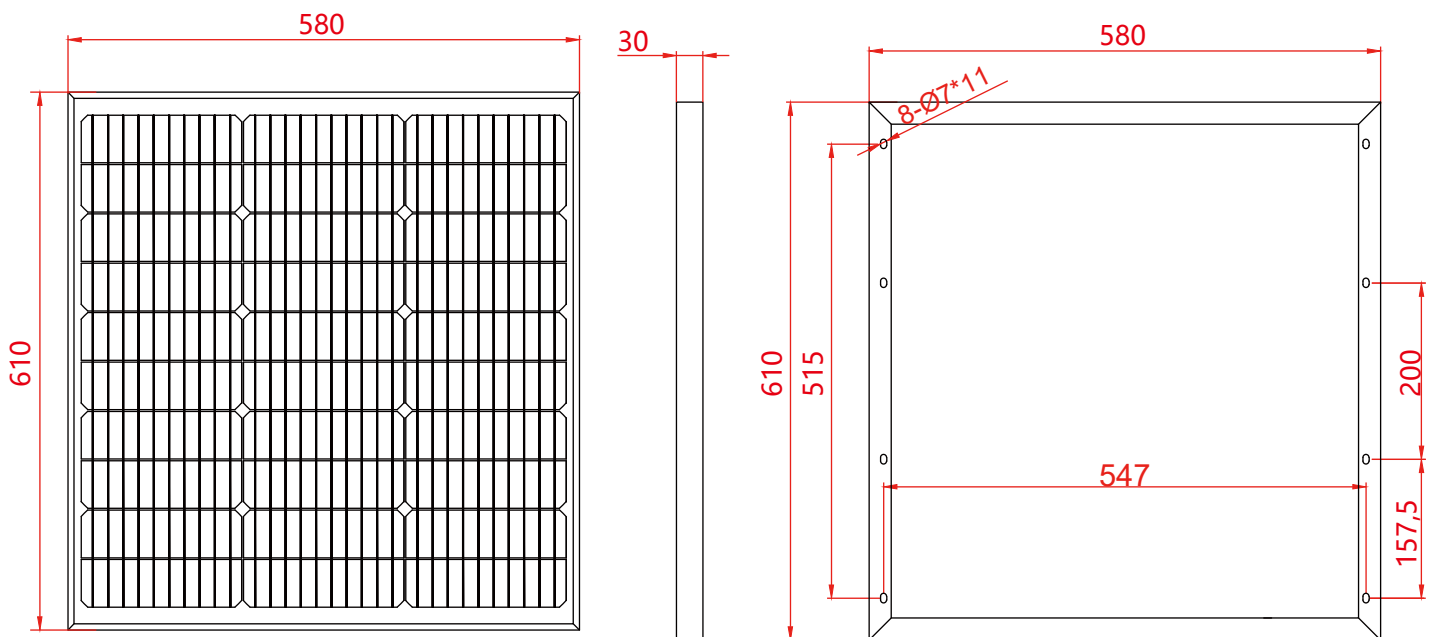

60W

# Parameter

Type	YL-30P	YL-60P
Panel		
Powe	30W/5V	60W/6V
Material	Monocrystalline silicon	
Solar cell efficiency	17-18%	
Lithium battery		
Capacity	80WH	128WH
Charge cycle times	2000 times	
Lamp head		
Luminous flux	1800lm	2500lm
Light output	12W	15W
LED qty	100pcs	
LED chip	Bridgelux	
Color temperature	7000-7500K	
CRI	≥70Ra	
Material of lamp head	Die-cast aluminum	
Lifespan	50000hrs	
System		
Light distribution	Batwing lens with polarized light	
Lighting time(full charged)	5-7 rainy days	
Operation temperature	-20℃~60℃	
Installation		
Top diameter of pole	60mm	
Height	3-5m	

# Application



Pathway



Village road



School



Park



Villa



Parking lots



Temple



Resort



Factory

